


► **TOP 3100**
DOSING SYSTEM

► TECHNICAL PERFECTION
REDUCED TO THE ESSENTIALS.

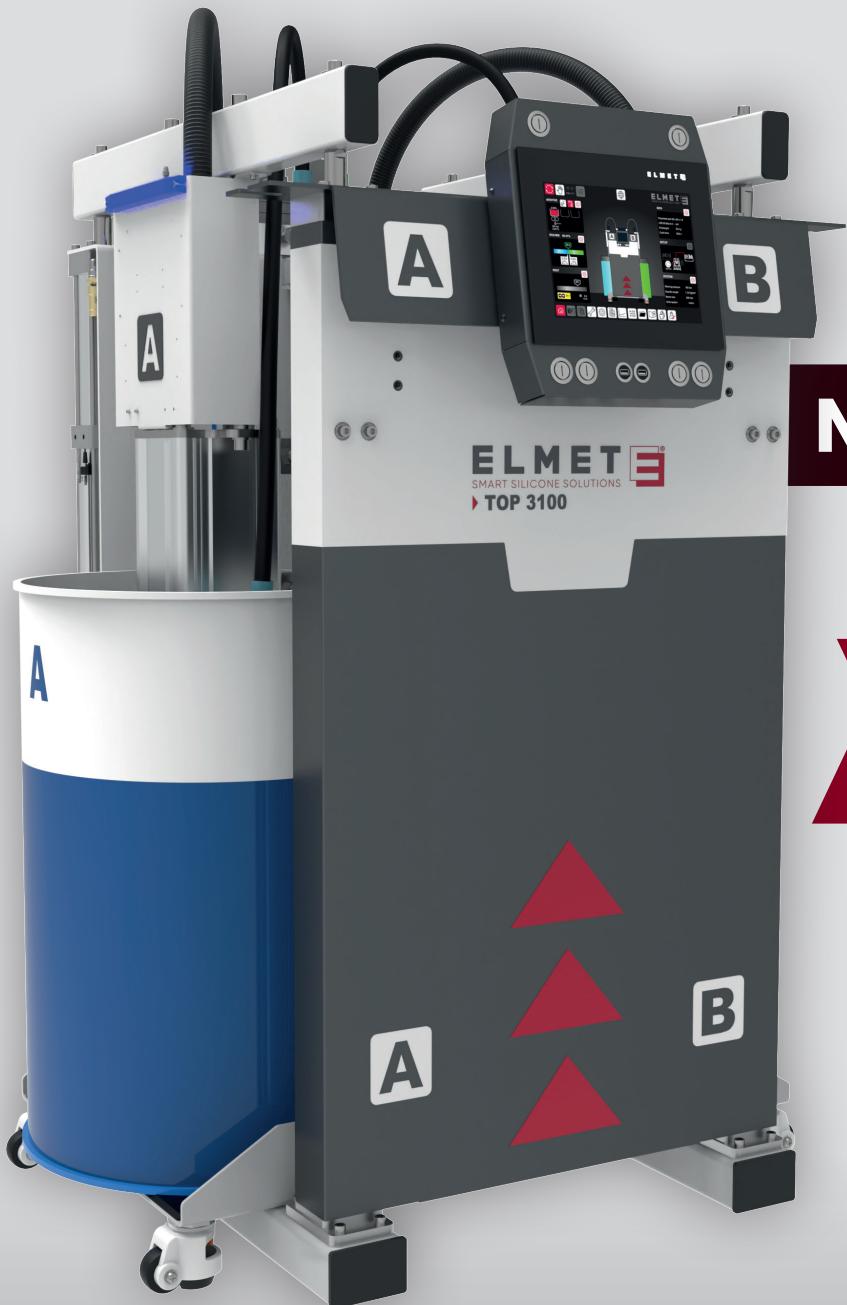

NEW

12
MONTH
WARRANTY



TRY-IT-FIRST
TEST FREE OF
CHARGE &
WITHOUT
OBLIGATION



TOP CONVEYED TOP MIXED TOP IN USE

REDUCED TO THE ESSENTIALS.

The dosing system has been reduced to the essential components without compromising on performance, process stability or service life. We guarantee not only the highest part quality, but also reliable continuity in your production. With a precise mixing ratio of silicones and additives and outstanding economy, the TOP 3100 sets a new standard on the market and extends Elmet's product range with another top dosing system.

POWERFUL

- ▶ Delivery rate more than 5 liters/minute / 1.32 gallon/minute*
- ▶ Max. Pump pressure 200 bar / 2900 psi

STABLE & PRECISE

- ▶ Stable pressure curve during dosing thanks to material pressure limiter
- ▶ High-precision volume counters guarantee exact mixing ratios and maximum process stability.
15.6 µl/Imp (64,000 Imp/L)

ECONOMIC EFFICIENCY

- ▶ Material utilization per container up to 99,6 %
- ▶ High-quality components = service life of 20+ years
- ▶ Low maintenance costs

ENERGY EFFICIENCY

- ▶ Minimal idling losses (50 Wh) - no pressure loss
- ▶ Maximum 300 Wh in operation

VERSATILE IN USE

- ▶ UL and CE compliant (FDA optional)
- ▶ Viscosity range: 0.001 to 3000 Pas** (>16,000 Pas***)

SAFE

- ▶ Safest system on the market (EN ISO 13849-1)
- ▶ Air detection

USER-FRIENDLY

- ▶ Communication protocol OPC UA (Optional)
- ▶ Guided drum change
- ▶ Intuitive and simple operation

PROCESSING UNIT 40D12

- ▶ Modular design
- ▶ Flow-optimized
- ▶ Integrated cooling
- ▶ Simple clamp connection
- ▶ Easy cleaning (step by step video)
- ▶ 45° & 90° connection

ADDITIVE LINES

FLEXIBLE & PRECISE

- ▶ Additive container: 1 l / 4 l / 20 l
0.26 gal / 1.06 gal / 5.28 gal
- ▶ Controlled additive supply
(resolution < 0.1 µl/Imp)

* Measured with silicone oil at $\dot{\gamma}=10$ 1/s $\eta = 2.7$ Pas (A+B component)

** $\dot{\gamma}=10$ /s | *** $\dot{\gamma}=0,2$ s

MORE THAN
25 YEARS OF
EXPERIENCE


ELMET
SMART SILICONE SOLUTIONS

TECHNICAL INFORMATION TOP 3100

Dimensions L/W/H (mm) (inch)	1260 x 1213 x 1900 (2676) 49.6 x 47.8 x 74.8 (105.4)
Drum sizes	200/20 liter / 55/5 gallons
Useable materials [Pas]**	0.001 bis 3000
Delivery rate per component @ 2,7 Pas	> 2350 cm ³ /min
Max. delivery pressure	200 bar / 2900 psi
Power supply	100 - 264 VAC, 4 A
Air supply	6 bar – 1000 NL / min (1/2")
Additive lines	1 Standard
Static mixer	1 Standard (Expandable)
Volume counter	Yes
Certifications	CE, UL, RoHS (FDA optional)
Eco-Mix (Simultaneous drum emptying)	Standard

Fix-Mix (Freely selectable mixing ratio)	Optional
Barcode drum detection	Optional
Drum lifter	Optional
Wheels	Optional
Customized paint work	Optional
Process documentation USB OPC UA	Standard Optional
Remote maintenance via VNC	Optional
Premium Connectivity	Optional
Simplex (1 dosing system to 2 IMM)	Optional
Tandem (2 dosing systems in alternating operation)	Optional


DELIVERY RATE PUMP UNIT M

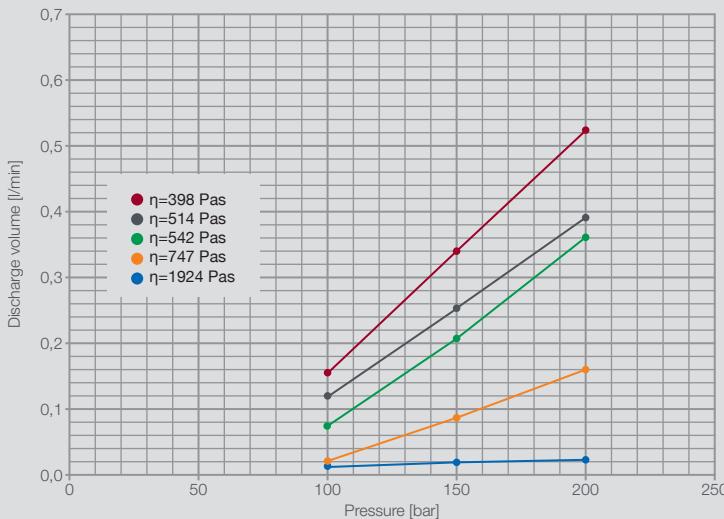

Viscosity measured at $\dot{\gamma}=10/s$



TOP 3100
LEARN MORE

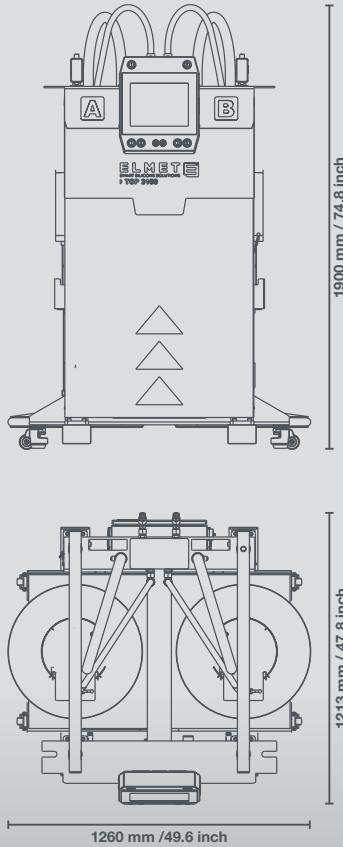

MOLDS. DOSING TECHNOLOGY. PRODUCTION SOLUTIONS.



www.elmet.com

FOR MORE THAN 25 YEARS

we have been developing customized, innovative solutions for our customers. As a global high-end full system and service provider for the processing and dosing of liquid silicone (LSR), we at ELMET are among the leading specialists in this field.

ELMET 02/2025



SMART SILICONE SOLUTIONS

ELMET Elastomere Produktions- und Dienstleistungs GmbH

Tulpenstraße 21 | 4064 Oftring | Austria | T: +43 7221 74577-0 | E: office@elmet.com

ELMET NORTH AMERICA INC.

712 Terminal Road, Lansing, MI 48906 USA
Local: 517-664-9011
Toll Free: 866-628-6499
E: office@elmet.com

ELMET GREATER CHINA

No. 20, Renxiang St., Dali Dist.,
Taichung City
T: +866-979-885-628
E: office@elmet.com

ELMET JAPAN

3-902-4, Yashirogaoka, Meito-ku,
Nagoya-shi, Aichi-ken 4650051
T: +81-70-7793-1895
E: office@elmet.com